

StoreJet™ 25F

External HDD


Description

This device is designed to expedite exchanging huge amounts of data between Transcend StoreJet™ and any desktop or notebook computer.

System Requirements

- Desktop or notebook computers with USB port
- One of following operating systems:
 - Windows 2000/XP/Vista, Mac OS 9.0 or above
 - Linux Kernel 2.4.2 or above

Placement

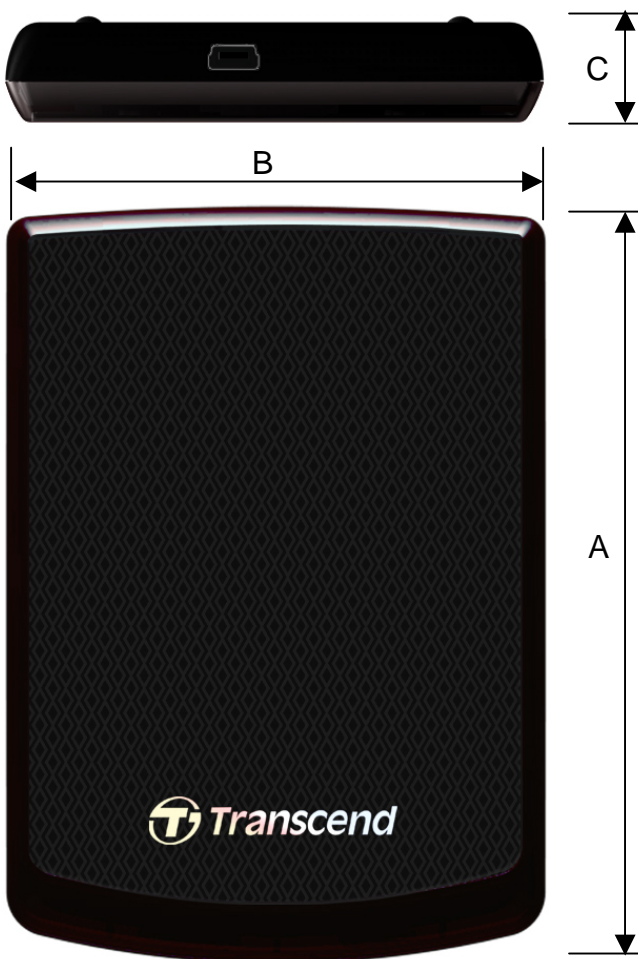

Features

- Designer gloss diamond pattern accented by a lustrous metallic finish
- Sleek compact shape with asymmetrical rounded edges for comfort and portability
- Anti-slip rubber feet provide a stable base for resting on a table or computer case
- Protective soft travel pouch
- High-speed USB 2.0 compliant and backwards compatible with USB 1.1
- Easy Plug and Play operation – no drivers required
- High capacity hard drive for storing, carrying, and backing-up files
- Completely USB powered. No external power supply or battery needed
- High-Speed data transfer rates up to 480Mbps per second
- Includes **StoreJet™ elite** data-management software
- LED power and data transfer activity indicator

Dimensions

| Side | Millimeters | Inches |
|------|---------------|--------------|
| A | 113.78 ± 1.00 | 4.480 ± 0.04 |
| B | 80.93 ± 1.00 | 3.186 ± 0.04 |
| C | 15.00 ± 1.00 | 0.591 ± 0.04 |

Ordering Information

| Transcend P/N | Capacity |
|---------------|----------|
| TS250GSJ25F | 250GB |
| TS320GSJ25F | 320GB |
| TS500GSJ25F | 500GB |

StoreJet™ 25F

External HDD

Pinouts

| Pin No. | Pin Name |
|---------|----------|
| 01 | VCC |
| 02 | USB- |
| 03 | USB+ |
| 04 | VSS |

Pin Identification

| Symbol | Function |
|--------|-------------------------|
| USB- | USB differential signal |
| USB+ | USB differential signal |
| VCC | USB Cable Power |
| VSS | Ground |

Specifications

| Environment | |
|-------------------|--------------------------|
| Storage Media | 2.5 inch USB Hard Disk |
| Temperature | Operation 5 °C to 55 °C |
| | Storage -20 °C to 60 °C |
| Power Supply | USB DC 5 Volt |
| Power Consumption | 1090mA (Max.) |
| Size (L x W x H) | 113.78mmx80.93mmx15.00mm |
| Weight | 163g(Max) |
| Certificates | CE, FCC, BSMI |

Above technical information is based on industry standard data and tested to be reliable. However, Transcend makes no warranty, either expressed or implied, as to its accuracy and assumes no liability in connection with the use of this product. Transcend reserves the right to make changes in specifications at any time without prior notice.